


TYPE TW-#8 SOLID GREEN

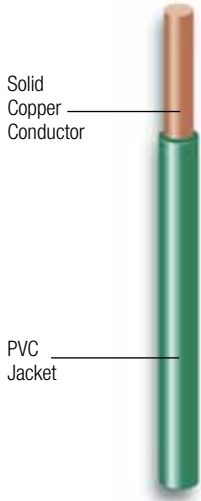

Solid
Copper
Conductor

PVC
Jacket

ENGINEERING SPECIFICATIONS:



Standards:

Underwriters Laboratories Stranded UL-83
ARRA 2009; Section 1605 "Buy American" Compliant

CONSTRUCTION:

Conductor:

Bare annealed copper per ASTM-B3

Insulation:

Color-coded Polyvinyl Chloride (PVC), heat and moisture-resistant, flame-retardant compound per UL-83

Applications:

Type TW is suitable for use in conduit or other recognized raceways for services, feeders, and branch-circuit wiring. Suitable for use in wet or dry locations where temperatures do not exceed 75°C.


Type TW-#8 Solid Green

Size (AWG)	Number of Strands	Insulation Thickness PVC (in)	Outside Diameter (in)	Net Weight (lbs/1000 ft)	Standard Packaging (ft)
8	Solid	0.045	0.219	69	500' 1000' 2500' 5000' reels

The above data is approximate and subject to normal manufacturing tolerances.

PRINT LEGEND: ENCORE WIRE CORPORATION 8 AWG TYPE TW 600 VOLTS OIL-RESISTANT I VW-1 (UL) DATE/TIME/OPER/QC

BRAKE CABLE / RV ZIP CORD

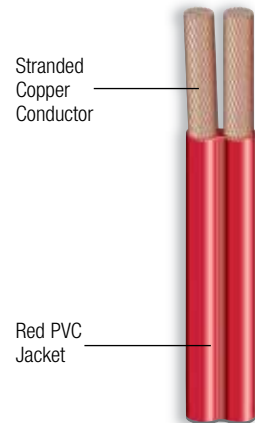

Stranded
Copper
Conductor

Red PVC
Jacket

ENGINEERING SPECIFICATIONS:

Standards:

Non-UL listed
ARRA 2009; Section 1605 "Buy American" Compliant

CONSTRUCTION:

Conductors:

S.A.E. stranded bare wire, soft-drawn copper conductors insulated with 60°C PVC

Insulation:

Color-coded Polyvinyl Chloride (PVC), heat and moisture-resistant, flame-retardant compound per UL-83

Applications:

For use on 12-volt lighting systems on recreational vehicles.
S.A.E. Non-UL listed Brake Cable consists of two parallel conductors.

Brake Cable/RV Zip Cord

Size (AWG)	Number of Conductors	Insulation Thickness PVC (in)	Outside Dimension (in)	Net Weight (lbs/1000 ft)	Standard Packaging (ft)
14	2	0.030	0.140 x 0.280	37	3000' reels
12	2	0.030	0.160 x 0.320	53	2000' reels
10	2	0.030	0.180 x 0.360	79	1000' reels

The above data is approximate and subject to normal manufacturing tolerances.